

## 2kVA and 3kVA AC Programmable Power Sources

<https://product.tdk.com/en/power/gac>  
[www.emea.lambda.tdk.com/gac](http://www.emea.lambda.tdk.com/gac)



Suitable for 1U high rack or bench mounting, the GENESYS™ AC (GAC) programmable power sources have a very high power density. The series currently offers power levels of 2kVA and 3kVA, with voltages adjustable from 0V to 350Vac and ±500Vdc (GAC-PRO models), currents from 0 to 30Arms and frequencies from 16Hz to 1200Hz, (5000Hz option on GAC-PRO). Multiple remote programming methods are available, including built-in LAN, USB, RS232 & RS485 and optional IEEE/GPIB interface. The GENESYS™ AC PRO models include real time analog control functionality necessary for more complex test scenarios. The GENESYS™ AC series has a full colour LCD, multi-language, touch panel display for ease of use and a GUI interface.

Features	Benefits
• 1U high	• Less Rack Space Used
• Full Colour Touch Panel Display	• Easy to Read and Program
• Built-in USB, LAN, RS-232 & RS-485 (plus others) Interfaces	• No Additional Cost
• Parallellable to 9kW single and multi-phase	• Scalable for Larger Systems and Multiple Phase Operation
• Five Year Warranty	• Low Cost of Ownership

### Part Numbering Scheme

An easy to use on-line part number configurator is available. Click [here](#) for EMEA region, click [here](#) for the Americas region.



GAC-PRO	-	03	B	A	1	A	-	00	A	00	A
Series Name	Front Panel Type/Color		Communication Interface			Frequency Limit			Accessories		
GAC	A - Full Panel (Grey)		1 - Built-in RS232, RS485, USB, LAN			A - AC Mode, 1200Hz			A - None		
GAC-PRO	B - Full Panel (Black)		2 - IEEE/GPIB + built-in RS232, RS485, USB, LAN			B - AC + DC Mode, 1200Hz*			Additional Options		
	C - Blank Panel (Grey)					C - AC + DC Mode, 5000Hz*			00 - None		
	D - Blank Panel (Black)										
Apparent Output Power	Input Voltage			Avionic Standards *(GAC-PRO Only)							
02 = 2kVA	A - 85-265Vac single phase **			00 - None							
03 = 3kVA	B - 170-265Vac 3-phase			01 - RTCA/DO 160							
06 = 6kVA***	C - 342-528Vac 3-phase			02 - MIL-STD 704							
09 = 9kVA***	** 2kVA, 3kVA only			03 - A350 (Airbus ABD100.1.8.1)							
				04 - RTCA/DO 160 & MIL-STD 704							
				05 - RTCA/DO 160 & A350 (Airbus ABD100.1.8.1)							
				06 - MIL-STD 704 & A350 (Airbus ABD100.1.8.1)							
				07 - RTCA/DO 160 & MIL-STD 704 & A350 (Airbus ABD100.1.8.1)							
				*(GAC-PRO Only)							
IEC & Other Standards											
A - None									GAC-PRO Only*		
B - IEC61000-4-11									GAC-PRO Only*		
C - IEC61000-4-13									GAC-PRO Only*		
D - MIL-STD-1399-300 PART 1									GAC-PRO Only*		
E - IEC61000-4-11 & IEC61000-4-13									GAC-PRO Only*		
F - IEC61000-4-11 & MIL-STD-1399-300 PART 1									GAC-PRO Only*		
G - IEC61000-4-13 & MIL-STD-1399-300 PART 1									GAC-PRO Only*		
H - IEC61000-4-11 & IEC61000-4-13 & MIL-STD-1399-300 PART 1									GAC-PRO Only*		
I - Wave Generator & Harmonic Analysis									GAC ONLY		
J - IEC61000-4-11 & Wave Generator & Harmonic Analysis									GAC ONLY		
K - IEC61000-4-13 & Wave Generator & Harmonic Analysis									GAC ONLY		
L - IEC61000-4-11 & IEC61000-4-13 & Wave Generator & Harmonic Analysis									GAC ONLY		

\*\*\*Contact factory for availability

<b>Specification</b>				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
<b>AC Input</b>				
Nominal Input Voltage	Vac	1-Phase: 100 – 240 3-Phase 200: 190 – 240 3-Phase 480: 380 – 480		Output power is limited to 1500W or 1500VA at input voltage below 170Vac
Input Voltage Range	Vac	1-Phase: 85 – 265 3-Phase 200: 190 – 240 3-Phase 480: 380 – 480		Output power is limited to 1500W or 1500VA at input voltage below 170Vac
Maximum Input Current	A	1-Phase: 12.4 at 200Vac 3-Phase 200Vac: 7.5 at 200Vac 3-Phase 480Vac: 4 at 380Vac	1-Phase: 18.5 at 200Vac 3-Phase 200Vac: 11.2 at 200Vac 3-Phase 480Vac: 6 at 380Vac	
Input Frequency	Hz	Nominal: 50 – 60, Frequency range: 47 – 63		
Power Factor	%	1-Phase: 0.96 1-Phase: 0.98	3-Phase: 0.92 3-Phase: 0.94	Typical at rated output power, rated output current. DC mode or sine wave the load power factor is 1
Efficiency	%	1-Phase: 78 3-Phase: 79	1-Phase: 81.5 3-Phase: 82.5	Typical at rated output power, rated output current, DC mode or sine wave, load power factor is 1 3-Phase 200V models at 200Vac input, 3-Phase 480V at 380Vac input.
Hold Up Time (typ)	ms	≥10	≥10	Typical at rated output power, rated output current. DC mode or sine wave the load power factor is 1
Inrush Peak Current	A	<52	<52	Not including the EMI filter inrush current, less than 0.2ms. 1-Phase input, at input line ≥ 240Vac, less than 70A.
<b>Programming</b>				
AC Output Voltage				Combined with AC and DC output, the peak voltage must be between -500V to +500V
Rated RMS Output Voltage	V	350 Line-Neutral		Minimum voltage is guaranteed to a maximum 0.1% of the rated output voltage (350Vac, 500Vdc)
Setting Range	V	0 – 350.2		Maximum RMS voltage setting range is associated with the output current setting. When the output current setting is above 5.714A for 2kVA or 8.571A for 3kVA, the output voltage setting is limited to rated output power. Refer to Figure 1 and Figure 3.
Programming Resolution	V	≤0.02		
Programming Accuracy	%	16 – 1200Hz: ≤0.2, 1200.1 – 5000Hz: ≤0.4		
<b>AC Output Current</b>				
Rated Output RMS current	A	20	30	Minimum current is guaranteed to maximum 0.2% of rated output current.
Setting Range	A	0 – 20.2	0 – 30.2	Maximum RMS current setting range is associated with the output voltage setting. When the output voltage setting is above 100Vac, the output current setting is limited to rated output power. Minimum constant current regulation value is 5% of the rated output current.
<b>AC Output Power</b>				
Rated Output Apparent Power	VA	2000	3000	
Load Power Factor	-	0 – 1 (leading or lagging)		
<b>Frequency</b>				
Range	Hz	1200Hz models: 16 – 1200, 5000Hz models: 16 – 5000		
Programming Resolution	Hz	16 – 1200Hz: 0.01, 1200.1 – 5000Hz: 0.1		
Programming Accuracy	%	≤0.01		

<b>Specification</b>				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
<b>DC Output Voltage</b>				
Rated Output DC Voltage	Vdc	±500		Minimum voltage is guaranteed to maximum 0.1% of rated output voltage (350Vac, 500Vdc)
DC Voltage Setting Range	Vdc	0 – ±500		
Programming Resolution	Vdc	≤0.02		Maximum DC voltage setting range is associated with the output current setting. When the output current setting is above 4A for 2kW or 6A for 3kW, the output voltage setting is limited to rated output power. Refer to Figure 2 and Figure 4.
Programming Accuracy	%	≤0.15		
<b>DC Output Current</b>				
Rated Output DC Current	Adc	20	30	Minimum current is guaranteed to maximum 0.2% of rated output current. Maximum DC current setting range is associated with the output voltage setting. When the output voltage setting is above 100VDC, the output current setting is limited to rated output power.
Setting Range	Adc	0 – 20.2	0 – 20.2	
<b>DC Output Power</b>				
Rated Output Power	W	2000	3000	

<b>Measurement</b>				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
<b>Output Voltage</b>				
AC Voltage Resolution	V	≤0.02		
AC Voltage Accuracy	%	16 – 1200Hz: ≤0.2, 1200.1 – 5000Hz: ≤0.4		
DC Voltage Resolution	Vdc	≤0.02		
DC Voltage Accuracy	%	≤0.02		
<b>Output Current</b>				
RMS Current Resolution	A	≤0.005		
RMS Current Accuracy	%	≤1	≤0.6	
DC Current Resolution	Adc	≤0.005		
DC Current Accuracy	%	≤1	≤0.6	
Peak Current Resolution	A (peak)	≤0.005		
Peak Current Accuracy	%	≤1.5		
<b>Output Power</b>				
Active (real) Power Resolution	W	≤0.2		
Active (real) Power Accuracy	%	AC: ≤2.25, DC: ≤4.5	AC: ≤1.5, DC: ≤3	
Apparent Power Resolution	W	≤0.2		
Apparent Power Accuracy	%	≤2.25	≤1.5	
<b>Frequency</b>				
Resolution	Hz	16 – 1200Hz: 0.01, 1200.1 – 5000Hz: 0.1		
Accuracy	%	≤0.1		Accuracy is guaranteed above 5% of rated output voltage.
<b>Harmonics Measurement</b>				
Fundamental Frequency	Hz	16 – 1000		
Harmonic Frequency / Harmonic #	Hz	32 – 50000 / 2 – 50		
Measurement Items	-	RMS Voltage, RMS current, phase angle and THD		

Measurement				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
<b>Stability</b>				
Line Regulation	%	≤0.02		
Load Regulation	%	≤0.03		Load power factor is 1.
Total Harmonic Distortion (THD)	%	16 – 500: ≤0.4, 500 – 1200: ≤0.7, 1200 – 5000: ≤1		Load power factor is 1.
Temperature Coefficient	ppm/°C	50		ppm/°C of rated output voltage, following 30 minutes warm-up.
Temperature Stability (voltage)	%	±0.05 of FS over 8 hours. Constant line, load, and temperature. Remote sense connected		
Warm-up Drift (voltage)	%	Less than 0.05% of rated output voltage over 30 minutes following power on		
<b>Supplemental</b>				
Crest Factor / Maximum peak current	-	6:1 (6 times the rated RMS output current) / 120A	4:1 (4 times the rated RMS output current) / 120A	
Ripple RMS	mVdc	≤500		
Transient Response Time	µs	≤40		Time for output voltage to recover within 0.5% of its rated output for a load change 10~90% of rated output current. Output set point: 10 – 100%, local sense, load power factor is 1.
Response Speed T(rise), T(fall)	µs	1200Hz models: ≤120; 5000Hz models: ≤40		At 10% to 90% of the output voltage.
Voltage Slew Rate (typical)	V/µs	1200Hz models: 4.4; 5000Hz models: 16.34		
DC Offset Voltage (typical)	mVdc	≤35		
Remote Sense Compensation	-	AC, AC+DC mode: 35Vrms, 50V (peak); DC Mode: 35Vdc		
Start-up Delay	seconds	<7		
Parallel Operation	-	Possible. Form 3-phase system or increase 1-phase output power		
<b>Environmental</b>				
Operating Temperature	°C / °F	0 – 40 / 32 – 104		
Storage Temperature	°C / °F	-30 – 85 / -22 – 185		
Operating Environment	-	Overvoltage category II, Indoor use		
Operating Humidity	%	20 – 90 RH (no condensation)		
Storage Humidity	%	10 – 95 RH (no condensation)		
Altitude	m / feet	Operating: 2000 / 6562, Non-operating: 12000 / 39370		
<b>Protective Functions</b>				
Foldback Protection	-	Output shutdown when power source changes mode from CV to CC mode or from CC to CV mode. User presetable		
Output Overvoltage Protection (OVP)	-	Output shutdown when overvoltage is sensed on the output. Programming range: 110%. Accuracy: ≤0.5%		
Output Overvoltage Protection (OVP) Type	-	RMS – Shutdown when RMS voltage exceeds OVP RMS setting. Peak – shut-down when peak voltage exceeds OVP Peak setting		
Overtemperature Protection (OTP)	-	Output shutdown when ambient temperature sensor or internal temperature sensors thresholds are exceeded		
Overcurrent Protection (OCP)	-	Output shutdown when peak overcurrent is sensed on the output. Programming range: Up to 120A.		
AC Input Protection	-	Fuse on each phase, two fuses in 1-Phase input, three fuses in 3-Phase input. Not user accessible		
Output Undervoltage Limit (UVL)	-	Prevents adjusting output voltage below limit		
Output Undervoltage Protection (UVP)	-	Output shutdown when undervoltage is sensed on the output		
<b>Remote Control Interfaces (isolated from the output)</b>				
USB	-	2.0, Full Speed, Virtual COM Port, Type B high retention connector		
RS232	-	Up to 921.6kbps with optional handshake (RTS/CTS), DB9 connector		
RS485	-	Up to 921.6kbps, full duplex (4-wire), DB9 connector (shared with RS232)		
LAN	-	10/100Mbps, Auto-MDIX, Auto-Negotiation, built-in web server		
GPIB (Optional interface)	-	IEEE488.1, IEEE488.2 compliant		

<b>Measurement</b>				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
<b>Signals and Controls (isolated from the output)</b>				
Constant Voltage / Constant Current Monitor	-	Open collector. CC mode: On (0 – 0.6V). CV mode: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Power Supply OK #2 Monitor	-	Push pull. Output on: 4.5 – 5.5V. Output off: 0 – 0.6V. Maximum source / sink current: 10mA		
Power Supply OK #1 Monitor	-	Open collector. Output on: On (0 – 0.6V). Output off: Off. Maximum voltage: 30V. Maximum sink current: 10mA. Maximum low level input voltage: 0.8V.		
Trigger In Signals	-	Minimum high level input voltage: 2.5V. Maximum high level input: 5V. Positive edge trigger width: 10us minimum. Maximum Tr,Tf: 1us. Minimum delay between 2 pulses: 1ms		
Trigger Out Signals	-	Maximum low level output voltage: 0.6V. Minimum high level output voltage: 4.5V. Maximum high level output voltage: 5V. Maximum source / sink current: 10mA. Minimum pulse width: 100us		
Local / Remote Analog Programming Monitor	-	Open collector. Remote: On (0 – 0.6V). Local: Off. Maximum Voltage: 30V. Maximum sink current: 10mA		
Local / Remote Analog Programming Enable	-	Enable / Disable analog programming control by electrical signal or dry contact. Remote: On (0 – 0.6V) or short. Local: Off (2 – 30V) or open		
Enable / Disable (ENA) Power Source Output	-	Enable / Disable power source output by electrical signal or dry contact. Voltage levels: 0 – 0.6V or short, 2 – 30V or open. User selectable output on / off logic		
Interlock (ILC) Inhibit Power Source Output	-	Enable / Disable power source output by electrical signal or dry contact. Output on: 0 – 0.6V or short. Output OFF: 2 – 30V or open		
Programmed Signals	-	Two open drain programmable signals. Maximum voltage: 25V. Maximum sink current: 100mA		
AC Input Voltage OK Monitor	-	Open collector. AC input voltage OK: 0 – 0.6V. AC input voltage not OK: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Alarm (Fault) Monitor	-	Open collector. No faults: 0 – 0.6V. power source fault: Off. Maximum voltage: 30V. Maximum sink current: 10mA		
Emergency Power Off (EPO)	-	Enable / Disable power source output by electrical signal or dry contact. Output on: 0 – 0.6V or short. Output OFF: 2 – 30V or open		
<b>Analog programming and monitoring (isolated from the output)</b>				
Output Voltage Programming	-	Full mode range: $\pm 0 - 10V$ . RMS mode range: 0 – 10V. User selectable range: $\pm 2.5 - 10V$ . Accuracy: 0.3%		RMS mode, programming and monitoring.
Output Voltage Monitoring	-	Full mode range: $\pm 0 - 10V$ . RMS mode range: 0 – 10V. User selectable range: $\pm 2.5 - 10V$ . Accuracy: 0.4%		RMS mode, programming and monitoring.
Output Current Monitoring	-	Full mode range: $\pm 0 - 10V$ . RMS mode range: 0 – 10V. User selectable range: $\pm 2.5 - 10V$ . Accuracy: 2kVA - $\leq 1.3\%$ ; 3kVA - $\leq 0.9\%$		RMS mode, programming and monitoring.

Measurement				
Model		2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
<b>Software / Firmware Test Sequences</b>				
RTCA/DO 160	-	Environmental conditions and test procedures for airborne equipment		Available in Genesys AC Pro (must be acquired)
MIL-STD 704	-	Aircraft electric power characteristics		
A350 (Airbus ABD100.1.8.1)	-	Electric characteristics of A350 AC and DC equipment		
MIL-STD-1399-300 PART 1	-	Low voltage electric power, alternating current		
IEC61000-4-11	-	Voltage dips, short interruptions and voltage variations immunity		Available in Genesys AC and Genesys AC Pro (must be acquired)
IEC61000-4-13	-	Harmonics and interharmonics including mains signalling at a.c. power port		
IEC61000-4-14	-	Voltage fluctuation immunity test for equipment with input current not exceeding 16 A per phase		Available in Genesys AC and Genesys AC Pro. Wave Generator & Harmonic Analysis must be acquired acquired in Genesys AC.
IEC61000-4-17	-	Ripple on d.c. input power port immunity		
IEC61000-4-27	-	Unbalance, immunity test for equipment with input current not exceeding 16 A per phase		
IEC61000-4-28	-	Variation of power frequency, immunity test for equipment with input current not exceeding 16 A per phase		
IEC61000-4-29	-	Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests		
IEC61000-4-34	-	Voltage dips, short interruptions and voltage variations immunity tests for equipment with mains current more than 16 A per phase		

**Output Characteristics**

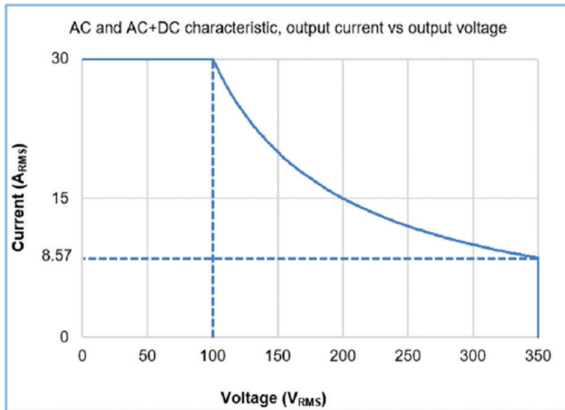


Figure 1: 3kVA AC and AC+DC characteristic

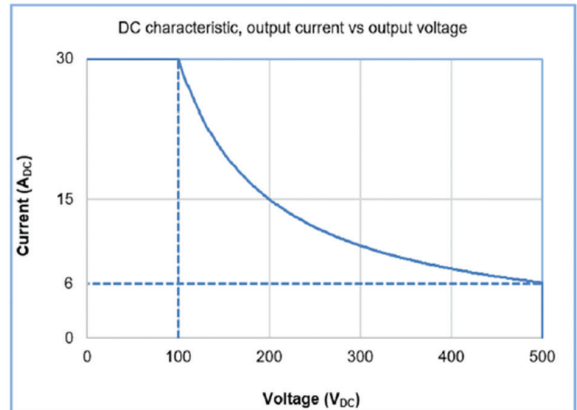


Figure 2: 3kW DC characteristic

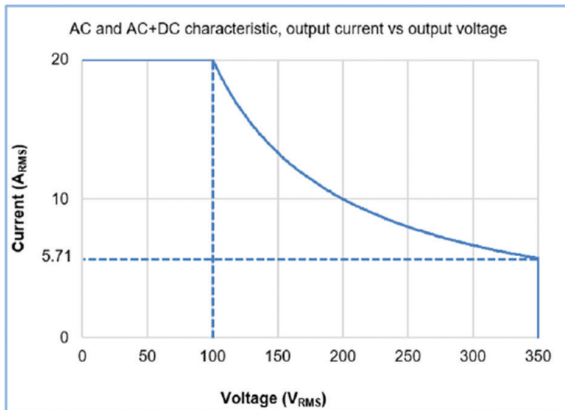


Figure 3: 2kVA AC and AC+DC characteristic

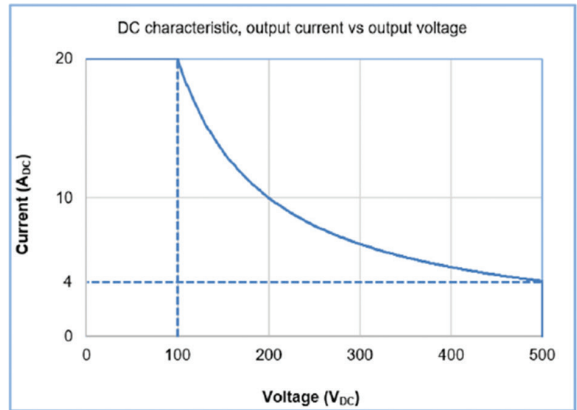


Figure 4: 2kW DC characteristic

**Measurement**

Model	2kVA 1200Hz 2kVA 5000Hz	3kVA 1200Hz 3kVA 5000Hz	Notes
-------	----------------------------	----------------------------	-------


**Mechanical**

Cooling	-	Forced air cooling by internal fans. Airflow direction: From front panel to power supply rear	
Weight	kg	≤8	
Dimensions	mm	Without strain relief: W: 423, H: 43.6, D: 544.5, With strain relief: W: 423, H: 43.6, D: 640.5	
Vibration	-	MIL-PRF-28800F, Class 3; 5-500 Hz per Paragraph 4.5.5.3.1	
Shock	-	MIL-PRF-28800F, Class 3; 30G half-sine with 11ms duration per 4.5.5.4.1	
Transportation Integrity	-	ISTA 1A	

**Regulatory Compliance (safety / EMC)**

Safety	-	IEC/UL/EN 61010-1 Ed. 3 (cTUVus, T-Mark, CE/UKCA)	Class I; Pollution Degree 2.
Interface Classification	-	Input, output (including sense), J9 and J10 are hazardous; J1, J2, J3, J4, J5, J6, J7 and J8 are non-hazardous	
Withstand Voltage	Vdc 1min	Input – Output (including sense), J1, J2, J3, J4, J5, J6, J7, J8, J9 and J10: 4000 Output (including sense), J9 and J10 – J1, J2, J3, J4, J5, J6, J7 and J8: 3850 Output (including sense), J9 and J10 – Ground: 3060 Input – Ground: 2835	
Isolation resistance	MΩ	>100 at 25°C, 70%RH, output to ground 500Vdc	
Isolation to Ground	V	350Vac, 500Vdc	
EMC General	-	EN 61326-1:2021	
Immunity	-	EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	
Conducted and Radiated Emissions	-	CISPR11 Class A	

## Outline Drawing

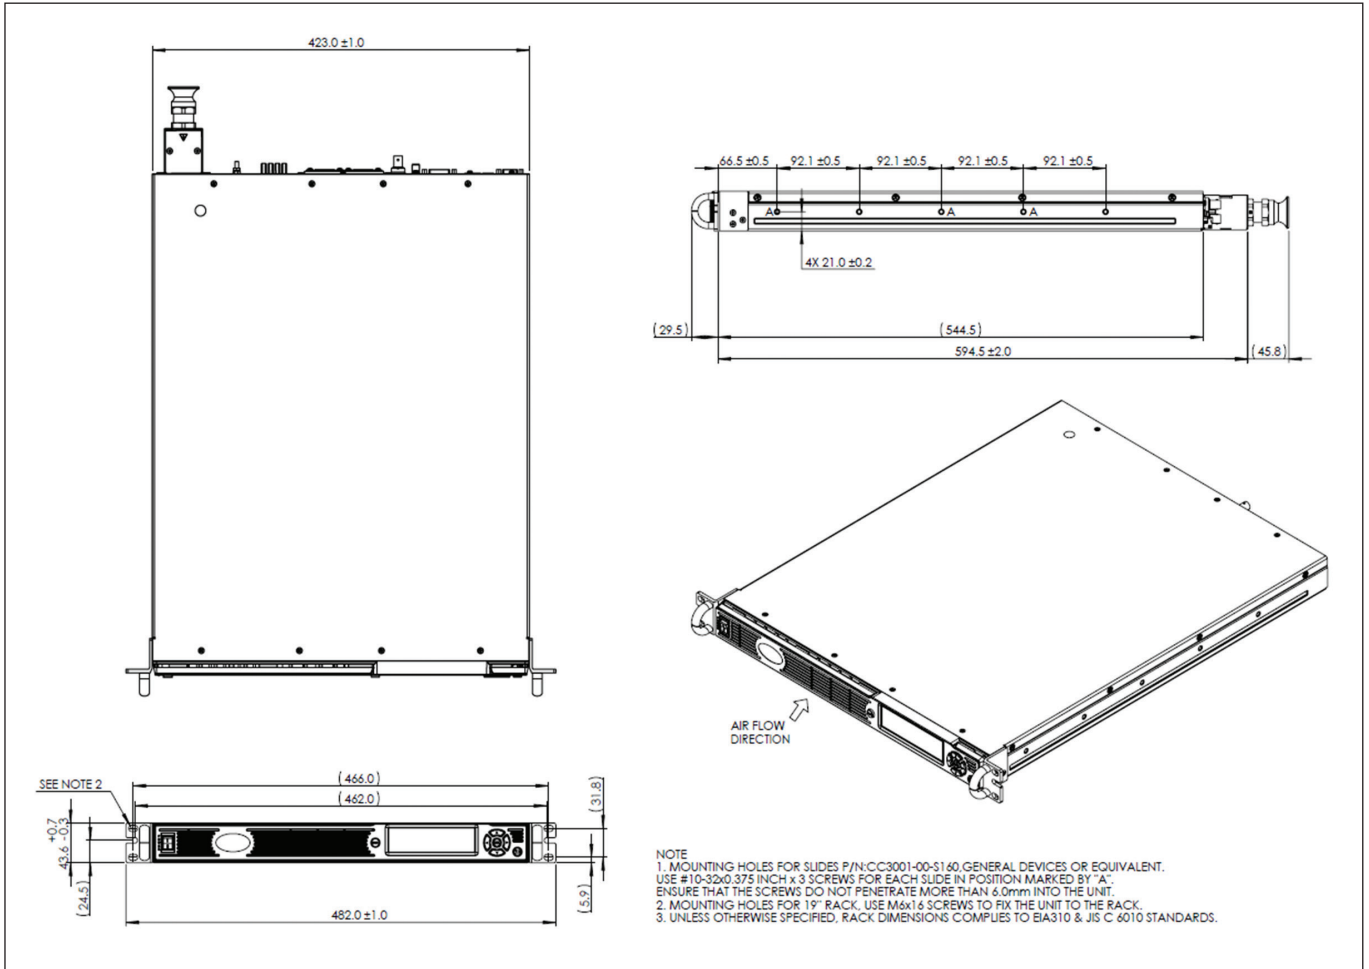





**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65  
 tlf.fr-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



**Italy Sales Office**

Tel: +39 02 61 29 38 63  
 tlf.it-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



**Netherlands**

tlf.nl-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0  
 tlg.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



**Austria Sales Office**

Tel: +43 2256 655 84  
 tlg.at-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



**Switzerland Sales Office**

Tel: +41 44 850 53 53  
 tlg.ch-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



**Nordic Sales Office**

Tel: +45 8853 8086  
 tlg.dk-powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**

Tel: +9 723 902 4333  
 tli.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tla.powersolutions@tdk.com  
 www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211  
 tfs.marketing@tdk.com  
 www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

